

OMS[®] v5.0.1

LPWAN UL-S1/S2 + wM-BUS C1


FOR END DEVICES

Our innovative OMS[®] v5.0.1 Dual Stack delivers a powerful solution from the latest OMS[®] generation, designed for modern metering applications.

By combining the proven Wireless M-Bus C-mode with the advanced OMS[®] LPWAN Splitting Mode, you benefit from maximum performance with reduced complexity.

Thanks to enhanced interoperability and the further development of TS-UNB technology (ETSI TS 103 357) by OMS[®], this stack is perfectly tailored for stationary utility measurement systems.

It empowers your customers to deploy efficient new OMS[®] networks or seamlessly expand existing ones – future-ready and reliable.

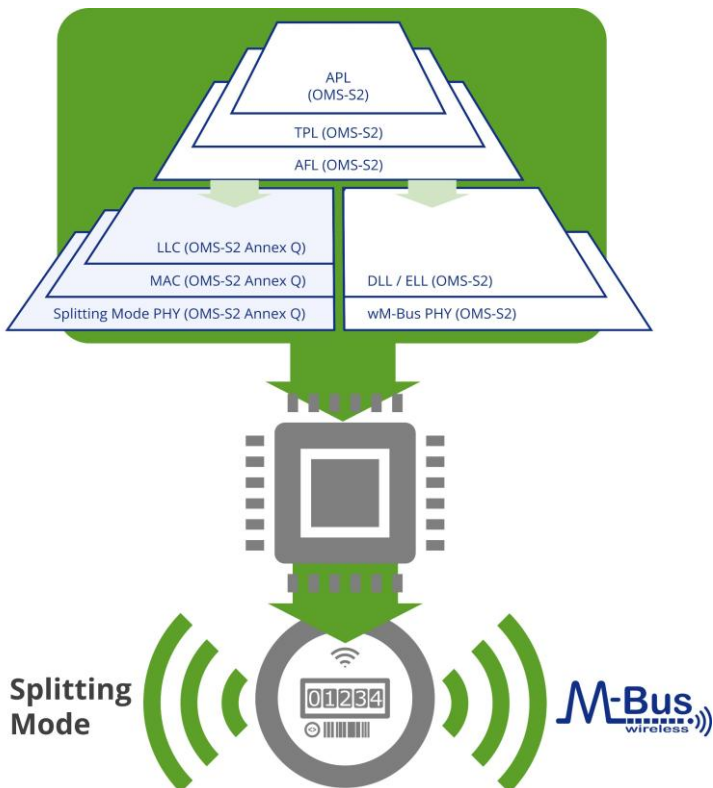

Compliant to EN 13757 and OMS[®] Specification, implementing Gen. 5 Annex Q "OMS[®] LPWAN"



Excellent robustness due to the implementation of the Telegram Splitting Technology



Significantly higher range of the new OMS[®] generation vs. OMS v4 – thanks to Splitting Mode



Pre-certification on reference hardware platform

SUPPORTED SPECIFICATIONS

Compliant according

- EN 13757 and OMS® Specification, implementing Gen. 5 Annex Q "OMS® LPWAN"
- TS-UNB – ETSI TS 103357

STACK FEATURES

- Unidirectional OMS® v5.0.1 LPWAN UL-S1 & UL-S1/S2
- Unidirectional Wireless M-Bus C-mode according to OMS® v5.0.1
- Telegram scheduler
- OMS® Security profile B
- Synchronous transmissions regardless of communication mode

REFERENCE HARDWARE

- EFR32FG23
- EFR32FG28


STACK CHARACTERISTICS

Memory requirements*

| Flash | Library |
|-------------------------|-----------|
| Stack library | ~ 19 kB |
| Platform | ~ 6 kB |
| Apps, Drivers, other SW | ~ 14,5 kB |
| SDK | ~ 60 kB |
| RAM | Library |
| Stack library | ~ 2 kB |
| Platform | ~ 1 kB |
| Apps, Drivers, other SW | ~ 12 kB |
| SDK | ~ 14,5 kB |

* The code sizes described above specify the typical required memory for operating the full featured protocol stack as a library including related drivers. Values based on EFR32FG23.

STACK PACKAGE ARCHITECTURE

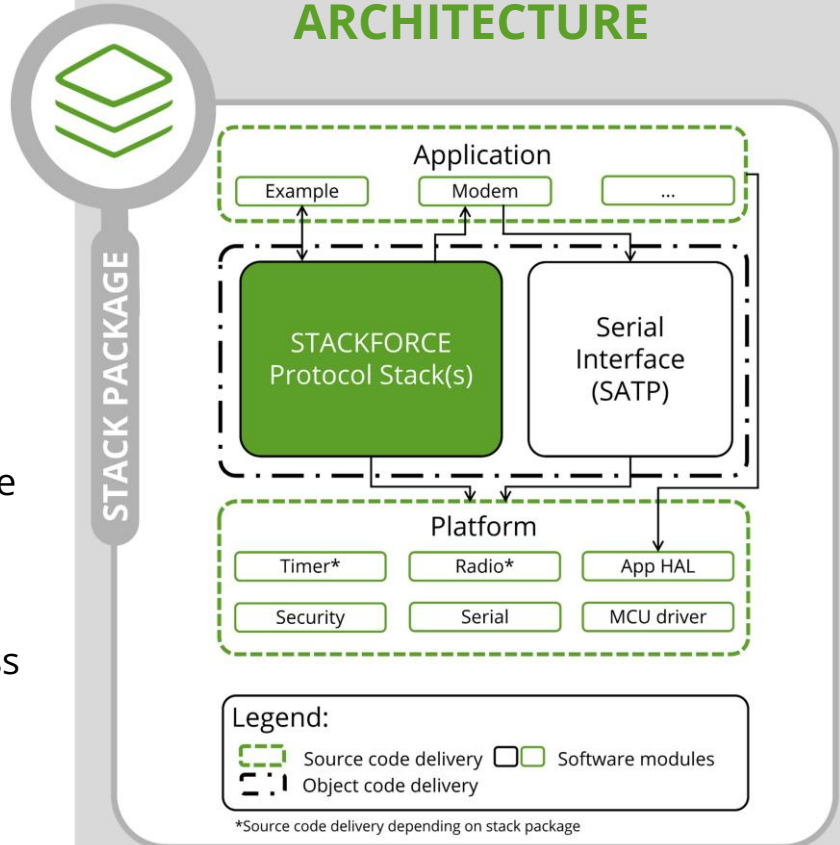

YOUR BENEFITS



The OMS® v5 stack generation enables a high degree of device interoperability



Always connected: Fixed networks with Splitting Mode and wM-Bus C-Mode fallback for walk-by/drive-by



Platform Interface enabling customization and fine tuning of Platform Driver



With a directly available OMS® v5.0.1 dual stack you shorten your time-to-market significantly