


OMS[®] v4.5.1 / wM-BUS FOR GATEWAY DEVICES

The OMS[®] Stack for Gateway Devices plays a central role within a smart metering network. It enables data transmission from numerous meters and sensors and allows the device to manage a large number of connections simultaneously.

The OMS[®] v4.5.1 stack implements all the protocol elements required for Wireless M-Bus compliance.

It also covers a large part of the options and features specified in EN 13757 and its sub-standards, with a focus on the most commonly used options and features.

With this stack, you can be sure that you are equipping your products with a proven and constantly evolving software solution.

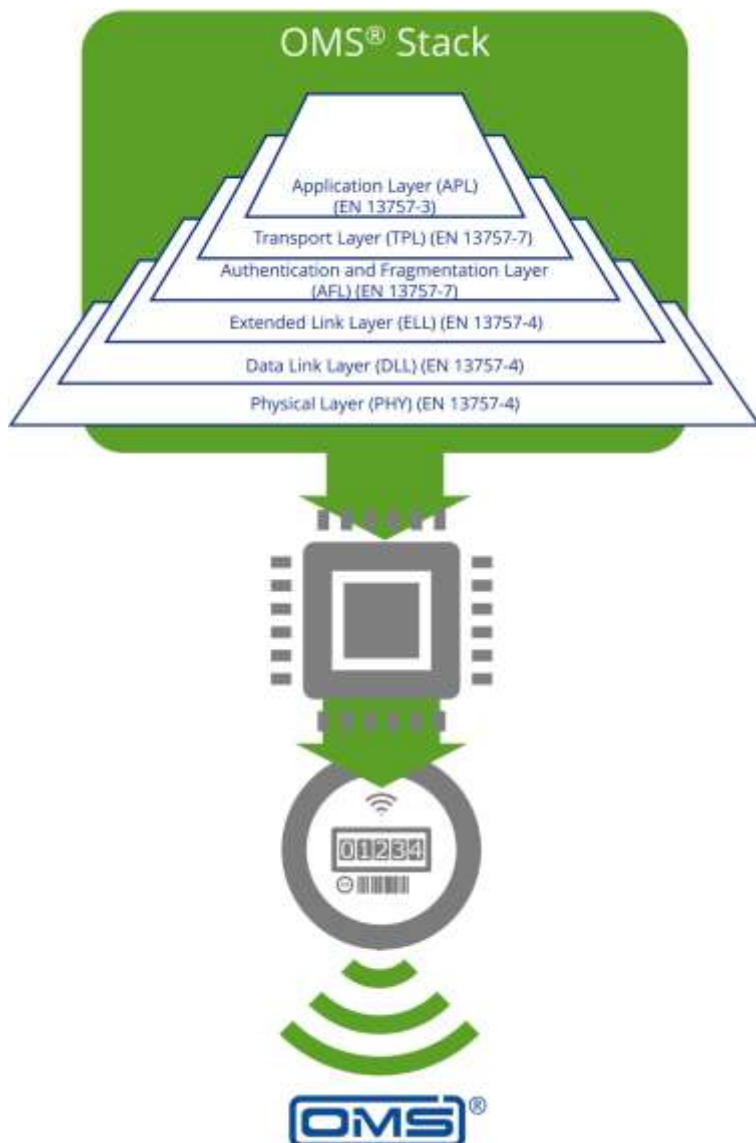

Compliant to EN 13757
-3/-4/-7 (Wireless) M-Bus
and OMS[®] Specification



Twenty end devices can
be connected to one
gateway device



Bidirectional as well as
unidirectional
communication possible



Pre-certification on
reference hardware
platform

SUPPORTED SPECIFICATIONS

Compliant according

- EN 13757-3/-4/-7
- OMS® Specification

STACK FEATURES

OMS® v4.5.1 / Wireless M-Bus

- Operation modes S, T or C
- Security profiles A or B (encryption modes 5 and 7)
- Security profile D (encryption mode 10)¹
- Enables application to support all use cases specified by Annex M „Requirements for OMS® use case support“
- Enables optimization of TRX timing¹

¹ Feature will be implemented in a later product version.

REFERENCE HARDWARE

- CC13x0
- CC13x2
- EFR32FG23
- EFR32FG28
- STM32WL3


STACK CHARACTERISTICS

Memory requirements*

	Stack	Apps	Platform, Drivers, other SW
Bidirectional			
Flash	~ 39,6 kB	~ 1,2 kB	~ 55,5 kB
RAM	~ 9,9 kB	~ 0,04 kB	~ 1,9 kB

* The code sizes described above specify the typical required memory for operating the full featured protocol stack as a library including related drivers. Values based on STM32WL3.

STACK PACKAGE ARCHITECTURE

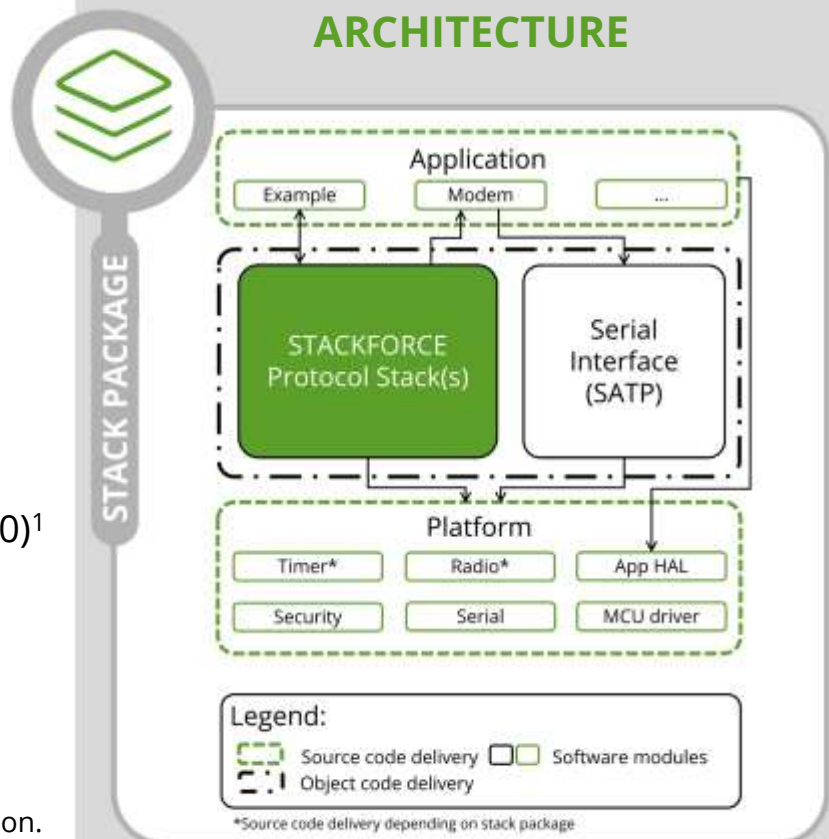

YOUR BENEFITS



Example application allowing an easy start-up of the stack



Platform Interface enabling customization and fine tuning of Platform Driver



Customization of this OMS® v4.5.1 stack to your requirements is possible



Professional support and long-term maintenance and availability